


## Main Product Characteristics:


$V_{DS}$	30V
$R_{DS(on)}$	92mohm(typ.)
$I_D$	1.4A <sup>①</sup>



SOT23



Marking and pin  
Assignment



Schematic diagram

## Features and Benefits:

- Advanced trench MOSFET process technology
- Special designed for PWM, load switching and general purpose applications
- Ultra low on-resistance with low gate charge
- Fast switching and reverse body recovery
- 150°C operating temperature



## Description:

It utilizes the latest trench processing techniques to achieve the high cell density and reduces the on-resistance with high repetitive avalanche rating. These features combine to make this design an extremely efficient and reliable device for use in power switching application and a wide variety of other applications

## Absolute max Rating:

Symbol	Parameter	Max.	Units
$I_D @ TC = 25^\circ C$	Continuous Drain Current, $V_{GS} @ 10V$	1.4 <sup>①</sup>	A
$I_D @ TC = 100^\circ C$	Continuous Drain Current, $V_{GS} @ 10V$	1 <sup>①</sup>	
$I_{DM}$	Pulsed Drain Current <sup>②</sup>	8.4	
$P_D @ TC = 25^\circ C$	Power Dissipation	0.62	W
$V_{DS}$	Drain-Source Voltage	30	V
$V_{GS}$	Gate-to-Source Voltage	$\pm 20$	V
$T_J \quad T_{STG}$	Operating Junction and Storage Temperature Range	-55 to + 150	$^\circ C$


## Thermal Resistance

Symbol	Characterizes	Typ.	Max.	Units
$R_{\theta JA}$	Junction-to-ambient ( $t \leq 10s$ ) <sup>③</sup>	—	200	$^\circ C/W$

**Electrical Characterizes @ $T_A=25^{\circ}\text{C}$  unless otherwise specified**


Symbol	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)DSS}$	Drain-to-Source breakdown voltage	30	—	—	V	$V_{GS} = 0V, I_D = 250\mu A$
$R_{DS(on)}$	Static Drain-to-Source on-resistance	—	92	120	m $\Omega$	$V_{GS}=10V, I_D = 1.4A$
$R_{DS(on)}$	Static Drain-to-Source on-resistance	—	120	160	m $\Omega$	$V_{GS}=4.5V, I_D=1.2A$
$V_{GS(th)}$	Gate threshold voltage	1	—	3	V	$V_{DS} = V_{GS}, I_D = 250\mu A$
$I_{DSS}$	Drain-to-Source leakage current	—	—	1	$\mu A$	$V_{DS} = 30V, V_{GS} = 0V$ $T_J = 125^{\circ}\text{C}$
		—	—	50		
$I_{GSS}$	Gate-to-Source forward leakage	—	—	100	nA	$V_{GS} = 20V$
		—	—	-100		$V_{GS} = -20V$
$Q_g$	Total gate charge	—	1.3	—	nC	$I_D = 1.4A,$ $V_{DS}=15V,$ $V_{GS} = 4.5V$
$Q_{gs}$	Gate-to-Source charge	—	0.5	—		
$Q_{gd}$	Gate-to-Drain("Miller") charge	—	0.5	—		
$t_{d(on)}$	Turn-on delay time	—	3	—	ns	$V_{GS}=10V, V_{DS} = 15V,$ $R_{GEN}=6\Omega, R_L=15\Omega,$
$t_r$	Rise time	—	5	—		
$t_{d(off)}$	Turn-Off delay time	—	20	—		
$t_f$	Fall time	—	2	—		
$C_{iss}$	Input capacitance	—	135	—	pF	$V_{GS} = 0V,$ $V_{DS} = 15V,$ $f = 1\text{MHz}$
$C_{oss}$	Output capacitance	—	30	—		
$C_{rss}$	Reverse transfer capacitance	—	20	—		

**Source-Drain Ratings and Characteristics**


Symbol	Parameter	Min.	Typ.	Max.	Units	Conditions
$I_S$	Continuous Source Current (Body Diode)	—	—	1.4 ①	A	MOSFET symbol showing the integral reverse p-n junction diode. 
$I_{SM}$	Pulsed Source Current (Body Diode)	—	—	8.4	A	
$V_{SD}$	Diode Forward Voltage	—	0.72	1.2	V	$I_S=1A, V_{GS}=0V$

## Test circuits and Waveforms


EAS test circuits:

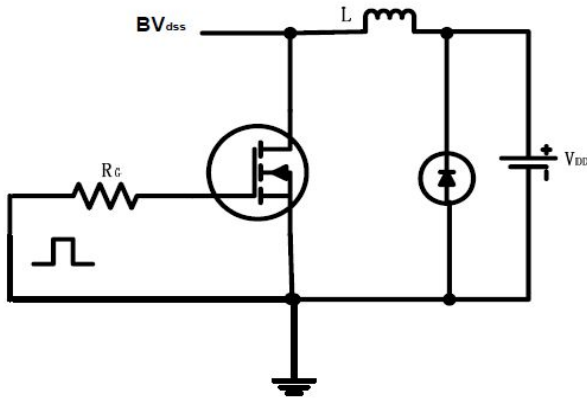


Gate charge test circuit:

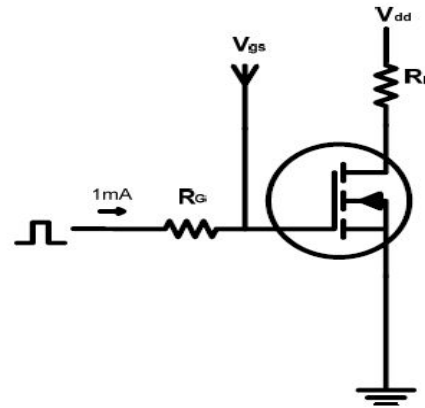

Switch Time Test Circuit:

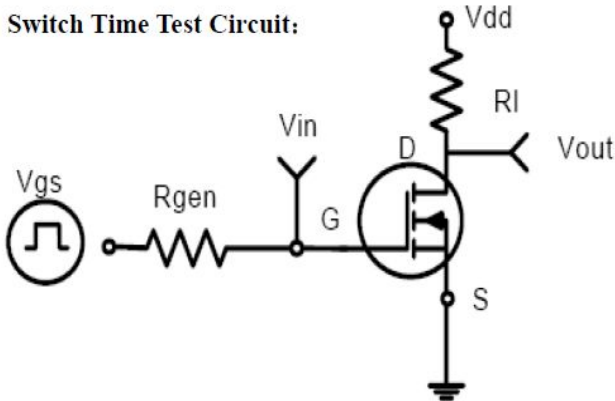

Switch Waveforms:

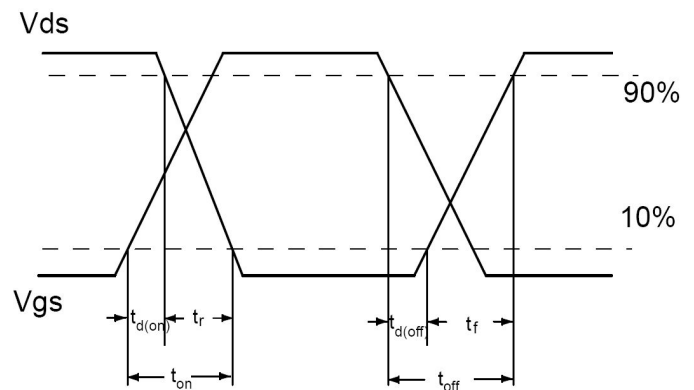


### Notes:

- ① Calculated continuous current based on maximum allowable junction temperature.
- ② Repetitive rating; pulse width limited by max junction temperature.
- ③ The value of  $R_{\theta JA}$  is measured with the device mounted on 1 in 2 FR-4 board with 2oz. Copper, in a still air environment with  $T_A = 25^\circ\text{C}$
- ④ These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of  $T_{J(\text{MAX})} = 150^\circ\text{C}$ .



**Mechanical Data:**

SOT-23 PACKAGE OUTLINE DIMENSION

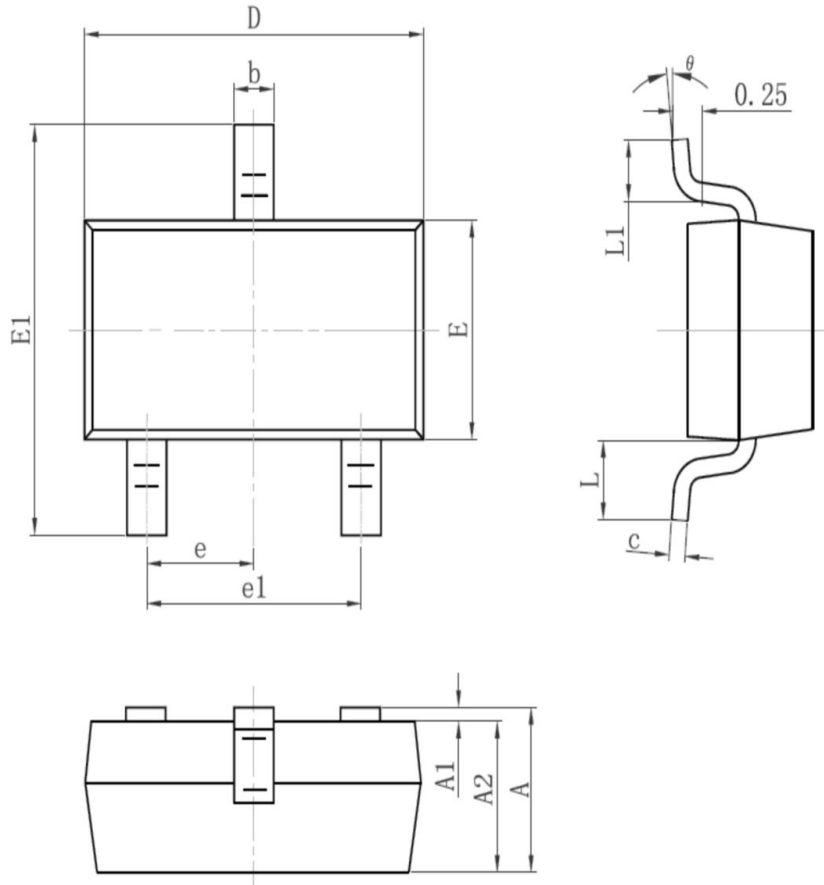

Symbol	Dimension In Millimeters		Dimension In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.95TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.55REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°



**Ordering and Marking Information**

**Device Marking: 3092**

**Package (Available)**  
**SOT-23**  
**Operating Temperature Range**  
**C : -55 to 150 °C**

**Devices per Unit**

Package Type	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/ Carton Box	Units/ Carton Box
SOT23	3000	10	30000	4	120000

**Reliability Test Program**

Test Item	Conditions	Duration	Sample Size
High Temperature Reverse Bias(HTRB)	Tj= 150°C @ 80% of Max V <sub>DSS</sub> /V <sub>CES</sub> /V <sub>R</sub>	168 hours 500 hours 1000 hours	3 lots x 77 devices
High Temperature Gate Bias(HTGB)	Tj=150°C @ 100% of Max V <sub>GSS</sub>	168 hours 500 hours 1000 hours	3 lots x 77 devices

- i) Any and all **Steifpower** products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your **Steifpower** representative nearest you before using any Steifpower products described or contained herein in such applications.
- ii) **Steifpower** assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all Steifpower products described or contained herein.
- iii) Specifications of any and all **Steifpower** products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- iv) **Steifpower Technology Company Limited** strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- v) In the event that any or all **Steifpower** products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- vi) No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of **Steifpower Technology Company Ltd.**
- vii) Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. **Steifpower** believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- viii) Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the **Steifpower** product that you intend to use.