

Bridge Rectifiers

Features

- Ideal for automated placement
- High surge current capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C


Typical Applications

General purpose use in AC/DC bridge full wave rectification for SMPS, lighting ballaster, adapter, battery charger, home appliances, office equipment, and telecommunication applications.



Mechanical Data

- **Package:** YBS4
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, Halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body
- **Soldering Method :** Recommend IR reflow, No wave soldering



■ Maximum Ratings (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	YBSL30005	YBSL3001	YBSL3002	YBSL3004	YBSL3006	YBSL3008	YBSL3010
Device marking code			YBSL30005	YBSL3001	YBSL3002	YBSL3004	YBSL3006	YBSL3008	YBSL3010
Repetitive peak reverse voltage	VRRM	V	50	100	200	400	600	800	1000
Average rectified output current @60Hz sine wave, R-load, T _c =100°C	I _O	A	3.0						
Surge(non-repetitive)forward current @60HZ sine wave, 1 cycle, T _j =25°C	IFSM	A	95						
Current squared time @1ms≤t<8.3ms T _j =25°C, Rating of per diode	I ² t	A ² s	37.5						
Storage temperature	T _{stg}	°C	-55 ~+150						
Junction temperature	T _j	°C	-55 ~+150						

■ Electrical Characteristics (T_a=25°C Unless otherwise specified)

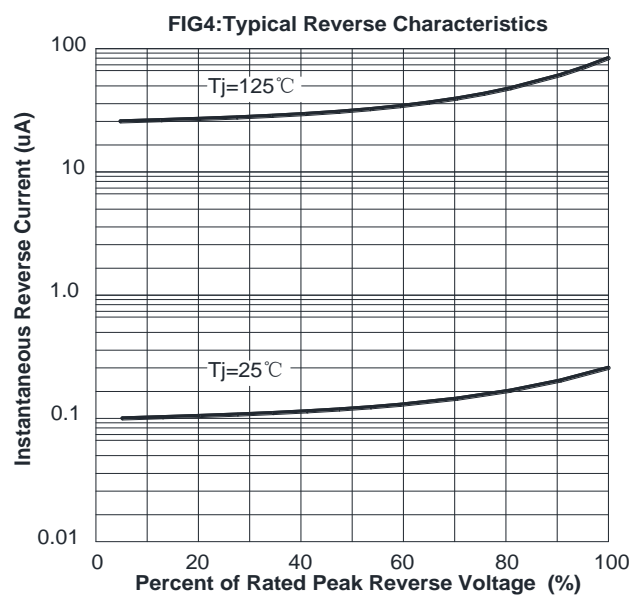
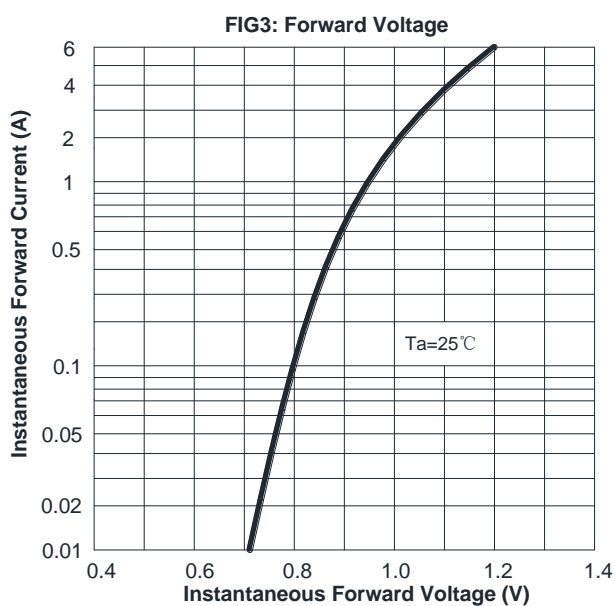
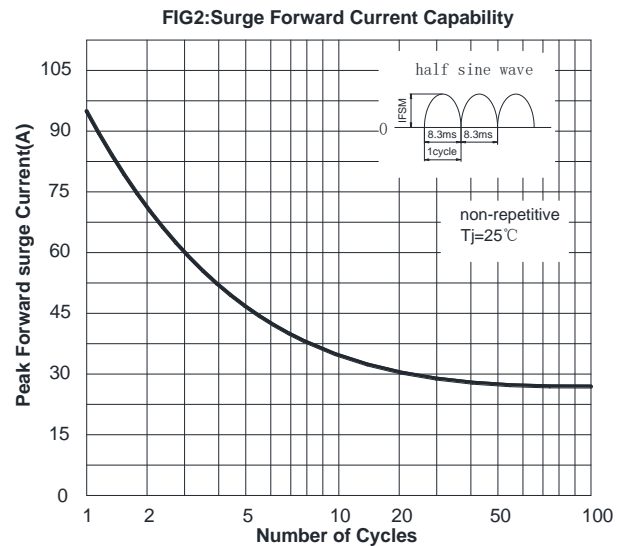
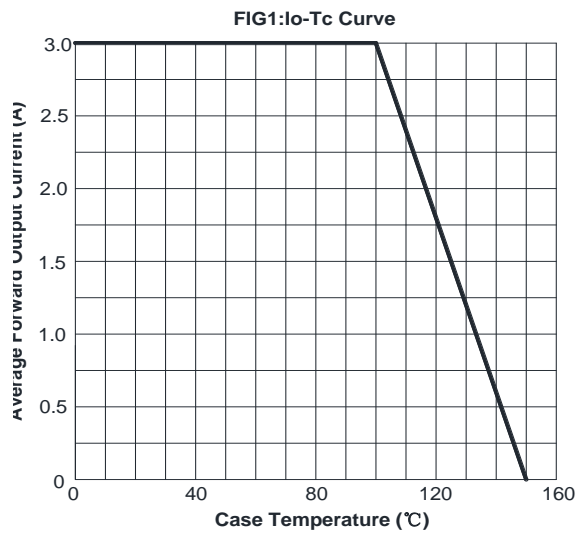
PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	YBSL30005	YBSL3001	YBSL3002	YBSL3004	YBSL3006	YBSL3008	YBSL3010
Maximum instantaneous forward voltage drop per diode	V _F	V	IFM=1.5A	1.0						
			IFM=3.0A	1.1						
Maximum DC reverse current at rated DC blocking voltage per diode @ VRM=VRRM	IRRM	μA	T _j =25°C	5						
			T _j =125°C	500						

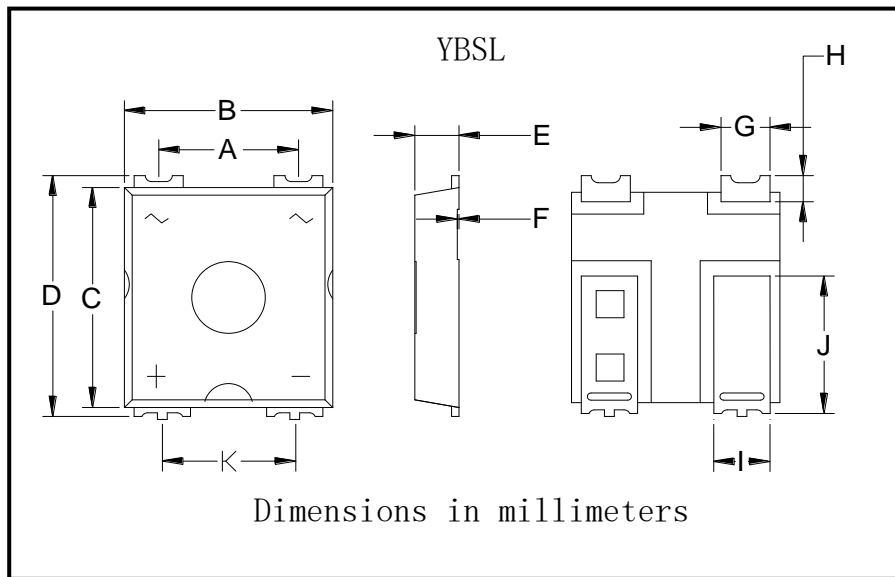
Thermal Characteristics ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	YBSL30005	YBSL3001	YBSL3002	YBSL3004	YBSL3006	YBSL3008	YBSL3010
Thermal Resistance	Between Junction and Ambient,	$R_{\theta J-A}$	$^{\circ}\text{C/W}$	32						
	Between Junction and Lead	$R_{\theta J-L}$		18						
	Between Junction and Case	$R_{\theta J-C}$		15						

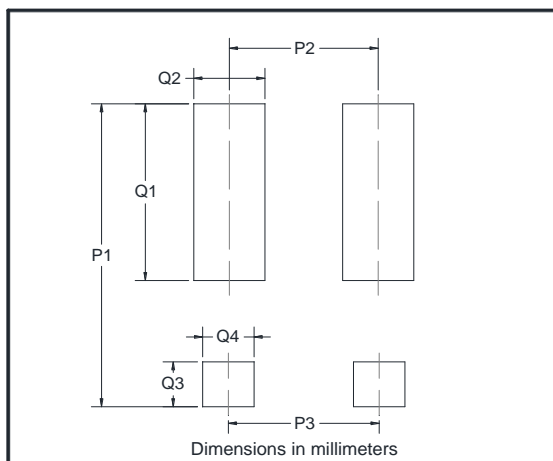
Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
YBSL30005-YBSL3010	F1	Approximate 0.40	2500	5000	35000	13" reel

Characteristics(Typical)


■ Outline Dimensions


YBS4		
Dim	Min	Max
A	5.60	5.80
B	8.30	8.70
C	9.00	9.40
D	10.15	10.55
E	1.70	1.90
F	0.02	0.12
G	1.90	2.10
H	0.20	1.00
I	2.20	2.40
J	5.80	6.20
K	5.30	5.50

■ Suggested pad layout


YBS4	
Dim	Min
P1	10.80
P2	5.40
P3	5.70
Q1	6.30
Q2	2.50
Q3	1.60
Q4	1.80

Disclaimers

These materials are intended as a reference to assist our customers in the selection of the Steifpower Technology products best suited to the customer's applications, they do not convey any license under any intellectual property rights, or any other rights, belonging to Steifpower Technology or third party. Steifpower Technology assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and is subject to change by Steifpower Technology without notice due to product improvements or other reasons.

It is therefore recommended that customers contact Steifpower Technology or an authorized Steifpower Technology representative for the latest product information before purchasing a product listed herein.

The information described here may contain technical inaccuracies or typographical errors.

Steifpower Technology assumes no responsibility for any damage, liability, or other loss arising from these inaccuracies or errors.

Please also pay attention to information published by Steifpower Technology by various means including our website home page (<http://www.steifpower.com>).

When using any or all of the information contained in these materials, including product data diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products.

Steifpower Technology assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

The prior written approval of Steifpower Technology is necessary to reprint or reproduce in whole or in part these materials.

Please contact Steifpower Technology or an authorized distributor for further details on these materials or the products contained herein.