


Features


- Low Turn-on Voltage
- Fast Switching
- Ultra-Small Surface Mount Package
- Lead Free/RoHS Compliant

Mechanical Data

- Case Material: Molded plastic, "Green" molding compound, compliant to UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminal Connections: Cathode Dot
- Terminals Finish - NiPdAu annealed over Copper lead frame solderable per MIL-STD-202, Method 208
- Weight: 0.001 grams (approximately)

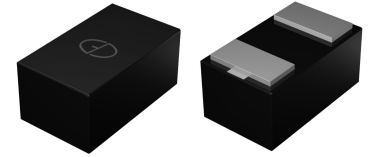

CASE: DFN1006-2



Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Value	Unit
V_{RRM} V_{RWM} V_R	Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	40	V
I_F	Forward Continuous Current	200	mA
I_{FSM}	Forward Surge Current @ $t < 1.0\text{s}$	600	mA

Thermal Characteristics

Symbol	Parameter	Value	Unit
P_D	Power Dissipation (Note 1)	250	mW
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient Air (Note 1)	400	$^\circ\text{C}/\text{W}$
T_J	Operating Temperature Range	-55~+125	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-65~+150	$^\circ\text{C}$




Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse Breakdown Voltage (Note 2)	$V_{(BR)R}$	$I_R = 10\mu\text{A}$	40	-	-	V
Forward Voltage	V_F	$t_p < 300\mu\text{s}, I_F = 1.0\text{mA}$ $t_p < 300\mu\text{s}, I_F = 40\text{mA}$	-	-	380 1000	mV
Reverse Leakage Current (Note 2)	I_R	$t_p < 300\mu\text{s}, V_R = 30\text{V}$		20	200	nA
Total Capacitance	C_T	$V_R = 0\text{V}, f = 1.0\text{MHz}$		2.3	5.0	pF
Reverse Recovery Time	T_{rr}	$I_F=10\text{mA}$ through $I_R= 10\text{mA}$ to $I_R = 1.0\text{mA}, R_L = 100\Omega$			5.0	nS


Notes:

1. Part mounted on FR-4 PC board with recommended pad layout
2. Short duration pulse test used to minimize self-heating effect.


Electrical characteristic curves ($T_A=25^\circ\text{C}$ unless otherwise specified)

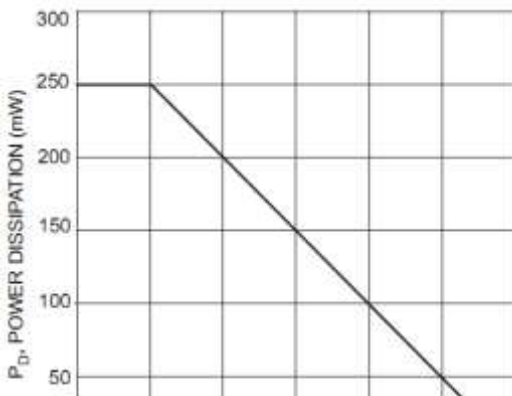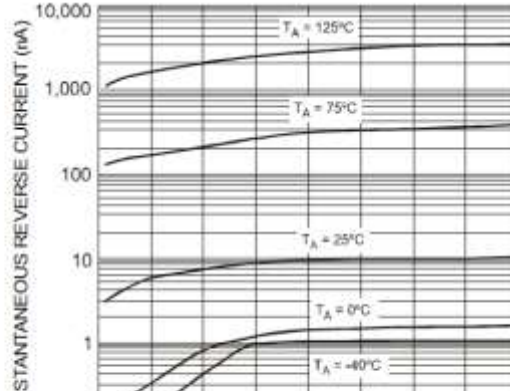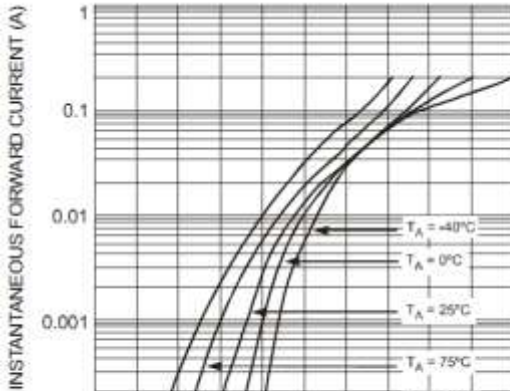


Package Outline Dimensions DFN1006-2 (dimensions in mm)



TOP VIEW



BOTTOM VIEW




SIDE VIEW

Lead finish: NiPdAu

COMMON DIMENSIONS (MM)			
PKG.	DFN1006-2L		
REF.	MIN.	NOM.	MAX.
A	>0.40	-	0.50
A1	0.00	-	0.05
A3	0.125REF		
D	0.95	1.00	1.05
E	0.55	0.60	0.65
b	0.20	0.25	0.30
L	0.45	0.50	0.55
e	0.65 BSC		

DFN1006-2 Suggested Pad Layout

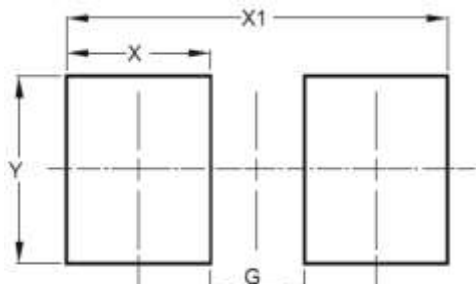

DIMENSIONS	VALUE (MM)
C	0.70
G	0.30
X	0.40
X1	1.10
Y	0.70