

# SNOAA - SNOMA

Surface Mount Glass Passivated Rectifiers

Reverse Voltage 50 to 1000 Volts Forward Current 1.5 Amperes

## Features



- ◆ Glass passivated chip
- ◆ For surface mounted applications
- ◆ Low reverse leakage current
- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ Plastic material has UL flammability classification 94V-0



**DO-214AC (SMA)**

## Mechanical Data

- ◆ Case: Molded plastic
- ◆ Polarity: Indicated by cathode band
- ◆ Terminal: solder plated copper
- ◆ Weight: 0.002 ounce, 0.064 gram

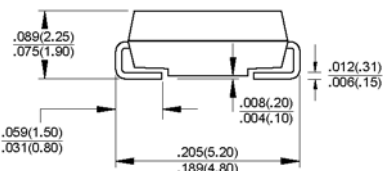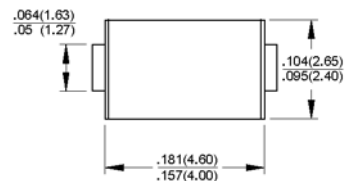

**Dimensions in inches and (millimeters)**

## Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Parameter	Symbols	SNOAA	SNOBA	SNODA	SNOGA	SNOJA	SNOKA	SNOMA	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current @ $T_J=100^\circ\text{C}$	$I_{(AV)}$	1.5							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	50.0							Amps
Maximum forward Voltage at 1.5A DC	$V_F$	1.15							Volts
Maximum DC reverse current at rated DC blocking voltage @ $T_J=25^\circ\text{C}$ @ $T_J=125^\circ\text{C}$	$I_R$	5.0 125							$\mu\text{A}$
Typical junction capacitance (Note 1)	$C_J$	20							pF
Typical thermal resistance (Note 2)	$R_{\theta JL}$	20							$^\circ\text{C/W}$
Operating temperature range	$T_J$	-55 to +150							$^\circ\text{C}$
Storage temperature range	$T_{STG}$	-55 to +150							$^\circ\text{C}$

**Notes:** 1. Measured at 1.0MHz and applied reverse voltage of 4.0V D.C.

2. Thermal Resistance Junction to Lead.



# SNOAA - SNOMA

Surface Mount Glass Passivated Rectifiers  
Reverse Voltage 50 to 1000 Volts Forward Current 1.5 Amperes

## RATINGS AND CHARACTERISTIC CURVES

