

## Features

- ◆ Glass passivated junction chip
- ◆ For surface mounted application
- ◆ Low profile package
- ◆ Built-in strain relief
- ◆ Ideal for automated placement
- ◆ Easy pick and place
- ◆ Superfast recovery time for high efficiency
- ◆ High temperature soldering:  
250°C/10 seconds at terminals
- ◆ Plastic material used carries Underwriters Laboratory  
Classification 94V-O

## Mechanical Data


- ◆ Cases: Molded plastic
- ◆ Terminals: Solder plated
- ◆ Polarity: Indicated by cathode band
- ◆ Weight: 0.003 ounce, 0.093 gram

## Maximum Ratings and Electrical Characteristics


Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%



DO-214AA (SMB)

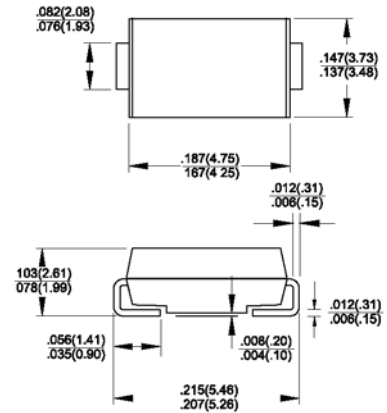

Dimensions in inches and (millimeters)

Parameter	Symbols	ES 2A	ES 2B	ES 2C	ES 2D	ES 2F	ES 2G	ES 2J	ES 2K	ES 2M	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	150	200	300	400	600	800	1000	Volts
Maximum RMS voltage	$V_{RMS}$	35	70	105	140	210	280	420	560	700	Volts
Maximum DC blocking voltage	$V_{DC}$	50	100	150	200	300	400	600	800	1000	Volts
Maximum average forward rectified current See Fig. 1	$I_{(AV)}$	2.0									Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	50.0									Amps
Maximum instantaneous forward voltage @ 2.0A	$V_F$	0.95			1.3		1.7			Volts	
Maximum DC reverse current at rated DC blocking voltage @ $T_A=25^\circ\text{C}$ @ $T_A=100^\circ\text{C}$	$I_R$					10.0 350					$\mu\text{A}$ $\mu\text{A}$
Maximum reverse recovery time (Note 1)	$t_{rr}$					35					nS
Typical junction capacitance (Note 2)	$C_j$	25				20				pF	
Typical thermal resistance (Note 3)	$R_{\theta JA}$ $R_{\theta BL}$					75 20					$^\circ\text{C/W}$
Operating junction temperature range	$T_J$					-55 to +150				$^\circ\text{C}$	
Storage temperature range	$T_{STG}$					-55 to +150				$^\circ\text{C}$	

- Notes:** 1. Reverse Recovery Test Conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{RR}=0.25\text{A}$   
 2. Measured at 1 MHz and Applied  $V_R=4.0$  Volts  
 3. Units Mounted on P.C.B. 5.0 x 5.0mm (0.013mm thick) Pad Areas

## RATINGS AND CHARACTERISTIC CURVES

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

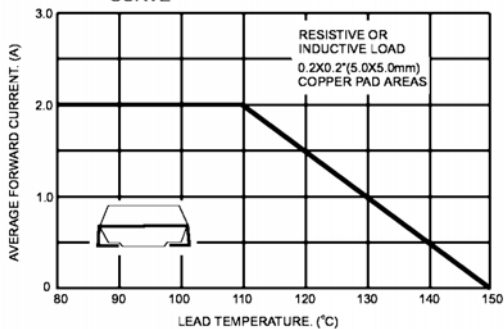


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

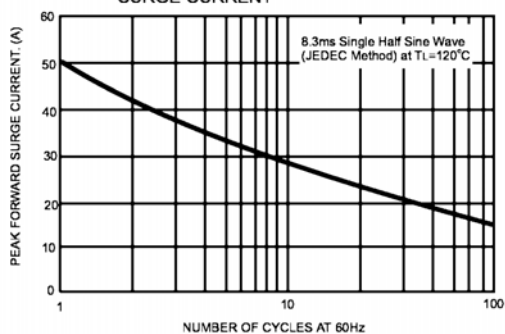


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

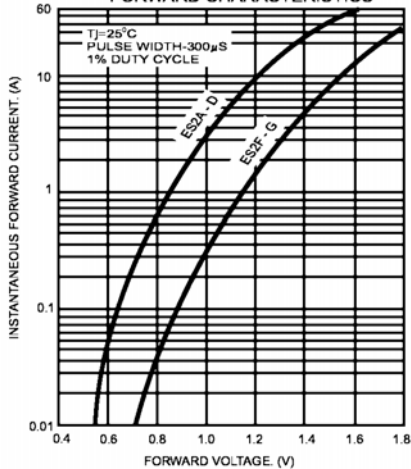


FIG.4- TYPICAL REVERSE CHARACTERISTICS

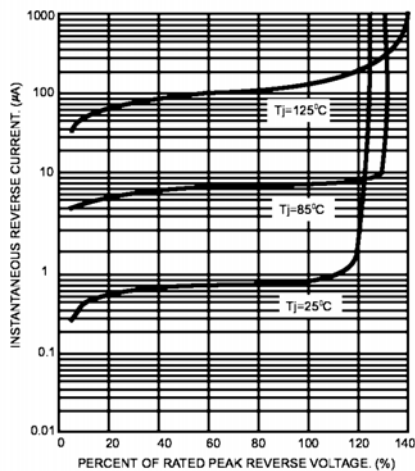


FIG.5- TYPICAL JUNCTION CAPACITANCE

