


Features

- Low forward voltage drop
- Low leakage current
- Moisture sensitivity: level 1, per J-STD-020
- Low profile, typical thickness 1.0mm
- Solder dip 260 °C, 10 s
- AEC-Q101 qualified



Package: eSGB(SMAF)

Applications

For uses in low voltage, high frequency inverters, free wheeling and polarity protection applications.

Maximum Ratings (T_A = 25°C unless otherwise noted)

Parameter	Symbol	LS56T2		Unit
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	60		V
Maximum RMS Voltage	V _{RMS}	42		V
Maximum DC Blocking Voltage	V _{DC}	60		V
Maximum Average Forward Rectified Current	I _{F(AV)¹⁾}	3.0		A
	I _{F(AV)²⁾}	5.0		A
Peak Forward Surge Current (8.3 ms single half sine-wave superimposed on rated load)	I _{FSM}	200		A
Rating for Fusing (t<8.3ms)	I ² t	166.8		A ² sec
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55 to +150		°C

Electrical Characteristics (T_A = 25°C unless otherwise noted)

Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
Minimum Breakdown Voltage	I _R =1mA	V _{BR}		60		V
Instantaneous Forward Voltage	I _F =1A, Ta=25°C	V _F	-	0.41	0.42	V
	I _F =2A, Ta=25°C		-	0.44	0.45	
	I _F =5A, Ta=25°C		-	0.51	0.52	
	I _F =5A, Ta=125°C		-	0.44	0.46	
Maximum DC Reverse Current at Rated DC Blocking Voltage	Ta=25°C	I _R	-	5.47	25	uA
	Ta=125°C		-	2.13	3	mA
Typical Junction Capacitance	4.0 V, 1 MHz	C _J		610		pF
Typical Thermal Resistance ¹⁾	Junction to Lead	R _{θJL}		30		°C/W

Note1:1) Mounted on FR-4 PCB with 8.0x 8.0mm copper pads

2) Mounted on Aluminum PCB



Ratings and Characteristics Curves ($T_A = 25^\circ C$ unless otherwise noted)

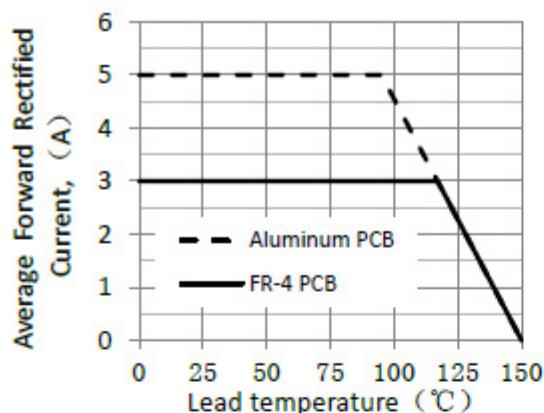


Figure 1. Forward Current Derating Curve

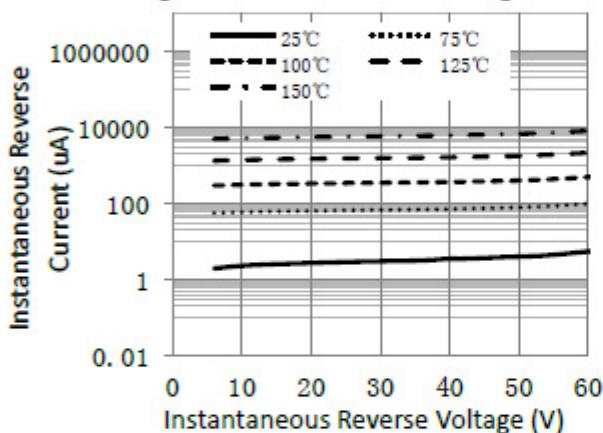


Figure 3. Typical Reverse Characteristics

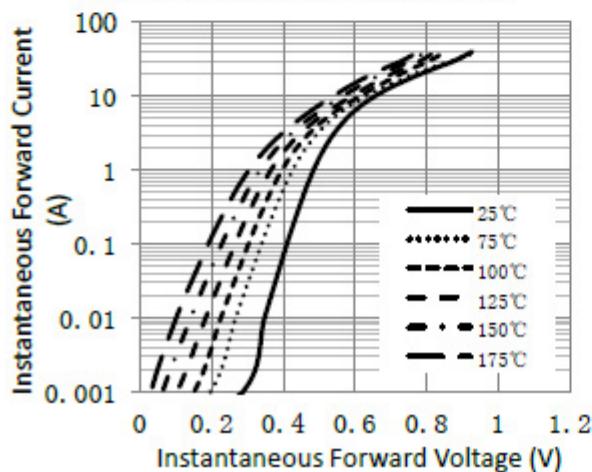


Figure 5. Typical Instantaneous Forward Characteristics

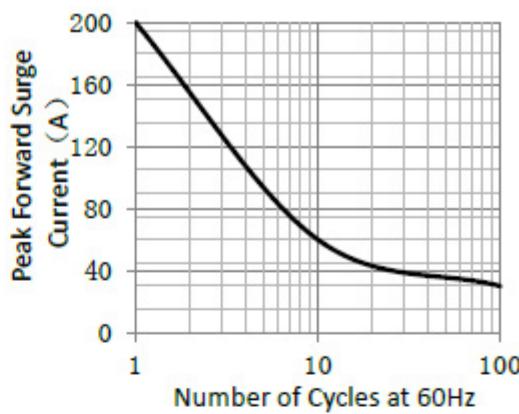


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current


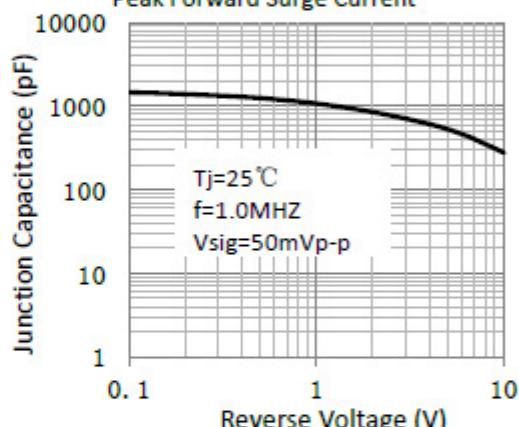


Figure 4. Typical Junction Capacitance

Package Outline Dimensions

eSGB (SMAF)

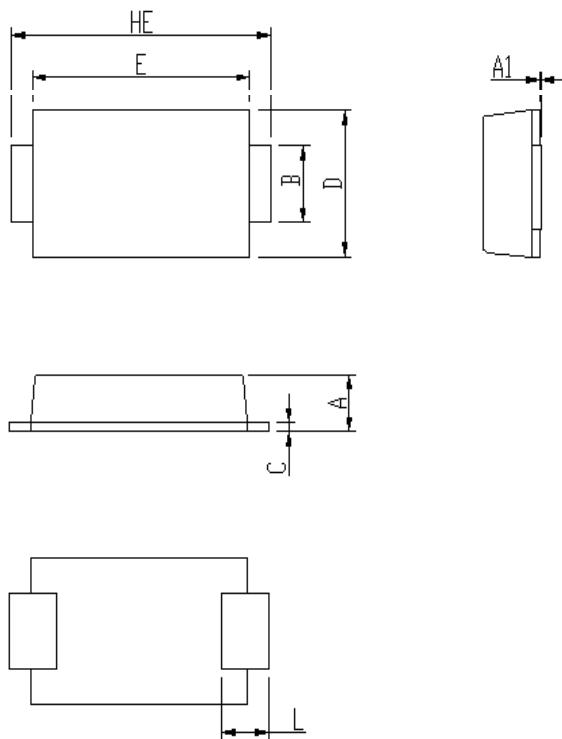

DIM	Unit: mm		Unit: inch	
	MIN	MAX	MIN	MAX
A	0.92	1.08	0.036	0.043
A1	0	0.1	0.000	0.004
B	1.25	1.45	0.049	0.057
C	0.1	0.25	0.004	0.010
D	2.6	2.8	0.102	0.110
E	4.1	4.3	0.161	0.169
L	0.7	1.1	0.028	0.043
HE	4.8	5.2	0.189	0.205

Soldering footprint

Packing Information

Reel size	Quantity/Reel	Quantity/Inner Box	Quantity/Carton
7"	3K	21K	84K
13"	10K	20K	180K

Tape & Reel Specification

