


Features

- Low forward voltage drop, low power losses
- High efficiency operation
- Plastic package has underwriters Laboratory Flammability Classification 94V-0




Package: TO-220-AB
SBR20300S

Package: ITO-220-AB
SBRF20300S

Package: TO-263
SBRB20300S

Mechanical Data

- Case: epoxy, molded
- Weight: 1.9 grams(TO-220/ITO-220),1.40 grams(TO-263) (approximately)
- Finish: all external surfaces corrosion resistant and terminal leads are readily solderable
- Lead temperature for soldering purposes: 260°C max. for 10 sec
- 50 units per plastic tube or tape reel packing 800/reel(TO-263)



Schematic Diagram






Maximum Ratings & Electrical Characteristics

($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Test Conditions		Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage			V_{RRM}	300	V
Working Peak Reverse Voltage			V_{RWM}	300	V
Maximum DC Blocking Voltage			V_{DC}	300	V
Maximum Average Forward Rectified Current at $T_c=105^\circ\text{C}$			$I_{F(AV)}$	20	A
Peak Forward Surge Current (8.3ms single half sine-wave superimposed on rated load per diode)			I_{FSM}	150	A
Peak Repetitive Reverse Current Per Leg at $t_p=2.0\mu\text{s}$, 1KHz			I_{RRM}	2.0	A
Voltage Rate of Change (rated V_R)			DV/dt	10000	V/ μs
Operating Junction Temperature Range			T_J	- 55 to +150	°C
Storage Temperature Range			T_{STG}	- 55 to +150	°C
Isolation Voltage (ITO-220-AB only) From Terminal to Heatsink $t = 1$ sec			V_{AC}	1500	V
Maximum Instantaneous Forward Voltage Per Leg	$I_F=10\text{A}$	$T_c=25^\circ\text{C}$	V_F	0.86 (0.81 typ.)	V
	$I_F=10\text{A}$	$T_c=125^\circ\text{C}$		0.81	
Maximum Reverse Current Per Leg at Working Peak Reverse Voltage		$T_J=25^\circ\text{C}$	I_R	200	uA
		$T_J=100^\circ\text{C}$		15	mA
Thermal Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)					
Symbol	Parameter	Typ (TO-220-AB/TO263)		Typ (ITO-220-AB)	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case Per Leg	2.0		4.0	°C /W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient Per Leg	62.5		62.5	°C /W


Note: Pulse test:300us pulse width, duty cycle=2%

Ratings and Characteristics Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

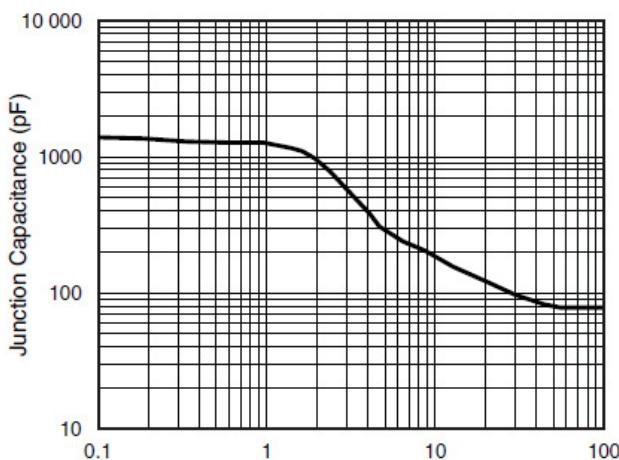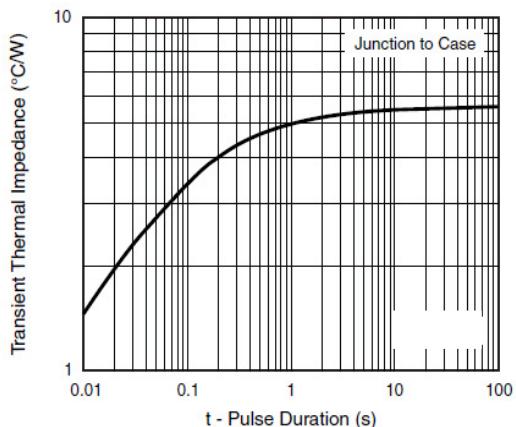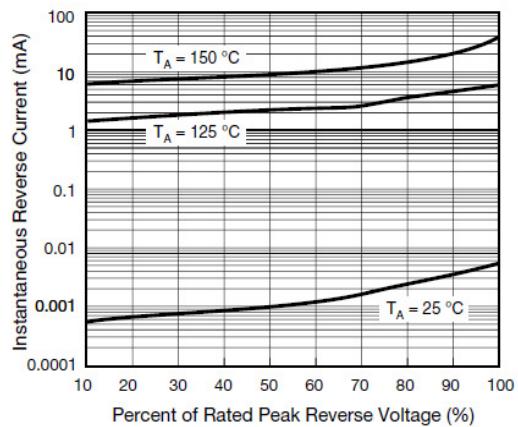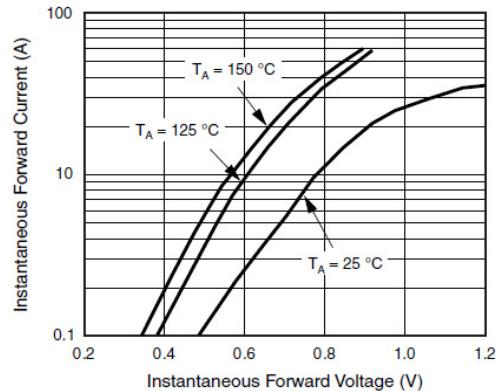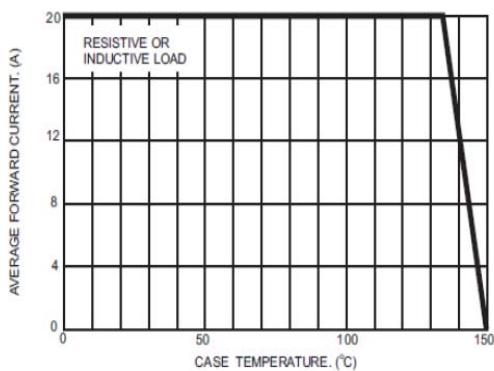


Unit: millimeters


TO-220-AB

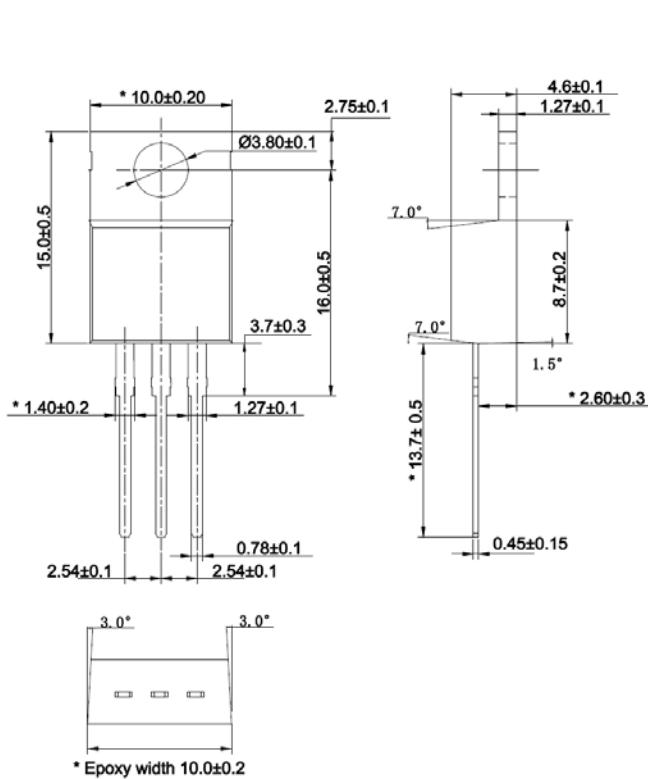

ITO-220-AB

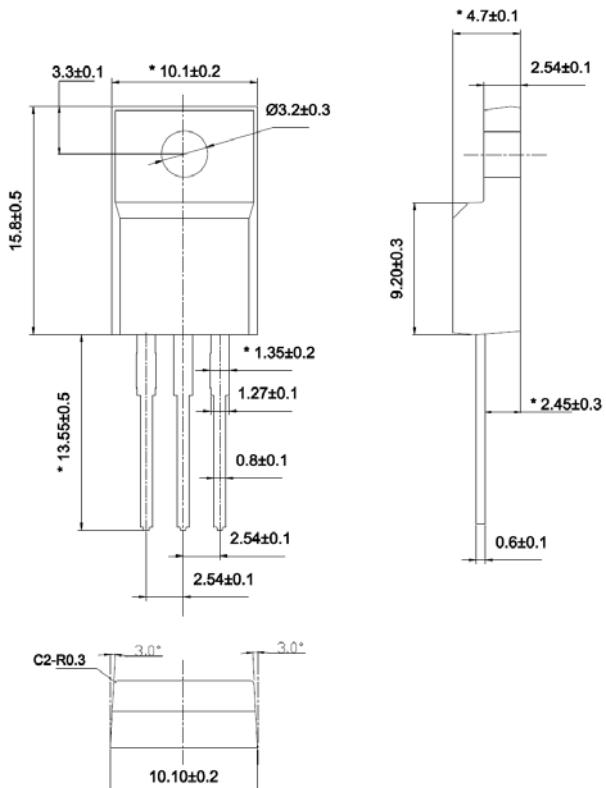

TO-263

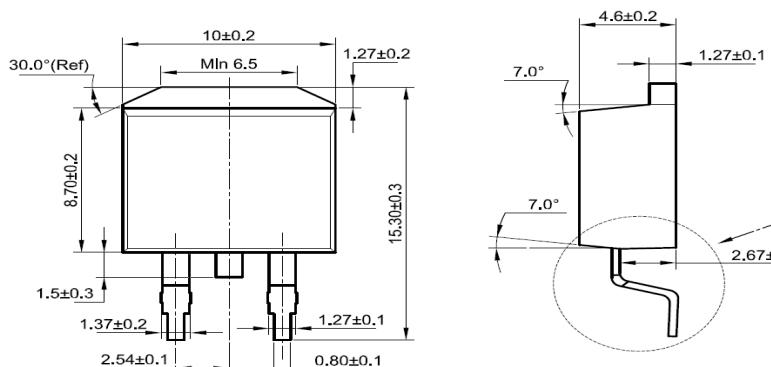

Detail A

