


Features

- ◆ For surface mounted application
- ◆ Glass passivated junction chip
- ◆ Built-in strain relief, ideal for automated placement
- ◆ Plastic material used carries Underwriters Laboratory Classification 94V-O
- ◆ Fast switching for high efficiency
- ◆ High temperature soldering:
250°C/10 seconds at terminals

Mechanical Data

- ◆ Cases: Molded plastic
- ◆ Terminals: Solder plated
- ◆ Polarity: Indicated by cathode band
- ◆ Weight: 0.007 ounce, 0.21 gram

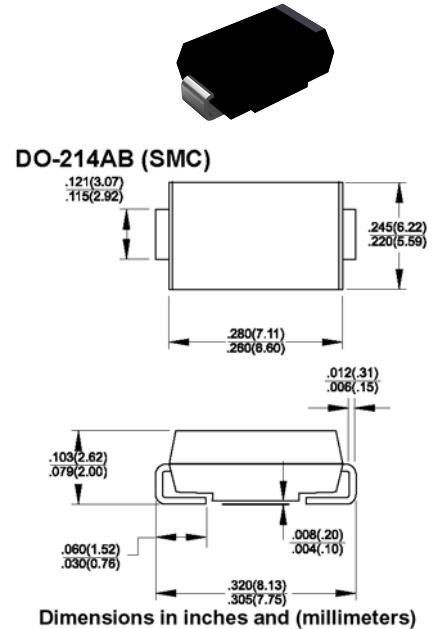

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Parameter	Symbols	SR3A	SR3B	SR3D	SR3G	SR3J	SR3K	SR3M	Units
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current See Fig. 1 @ T _I =75°C	I _(AV)	3.0							Amps
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	100.0							Amps
Maximum instantaneous forward voltage @ 3.0A	V _F	1.3							Volts
Maximum DC reverse current @T _A =25°C at rated DC blocking voltage @T _A =125°C	I _R	10.0 250							uA
Maximum reverse recovery time (Note 1)	t _{rr}	150				250	500		nS
Typical junction capacitance (Note 2)	C _J	75							pF
Typical thermal resistance (Note 3)	R _{JA} R _{JBL}	50.0 15.0							°C/W
Operating temperature range	T _J	-55 to +150							°C
Storage temperature range	T _{STG}	-55 to +150							°C

Notes: 1. Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$

2. Measured at 1 MHz and Applied $V_R=4.0$ Volts

3. Thermal Resistance from Junction to Ambient and from Junction to Lead Mounted on P.C.B. with 0.3" x 0.3" (8.0 x 8.0 mm) Copper Pad Areas.

RATINGS AND CHARACTERISTIC CURVES

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

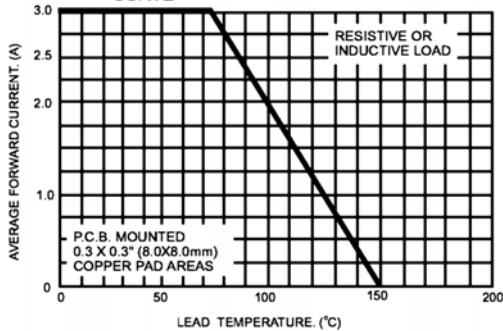


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

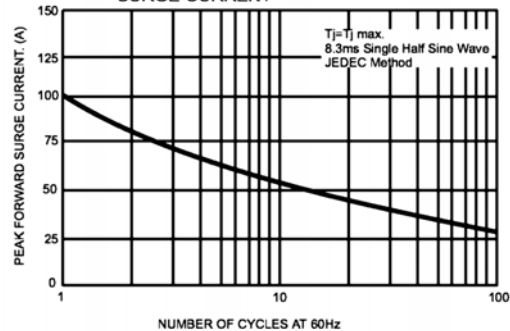


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

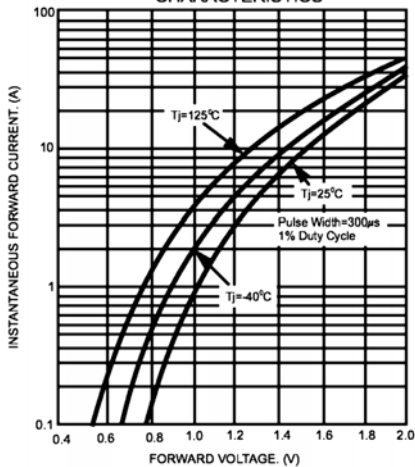


FIG.4- TYPICAL REVERSE CHARACTERISTICS

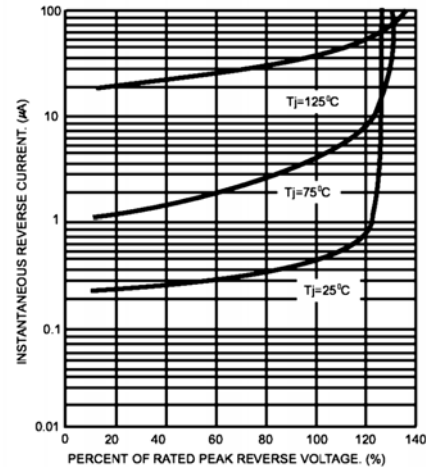


FIG.5- TYPICAL JUNCTION CAPACITANCE

