


General Description

These dual P Channel enhancement mode power field effect transistors are using trench DMOS technology.

This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

SOT23-6 Dual Pin Configuration

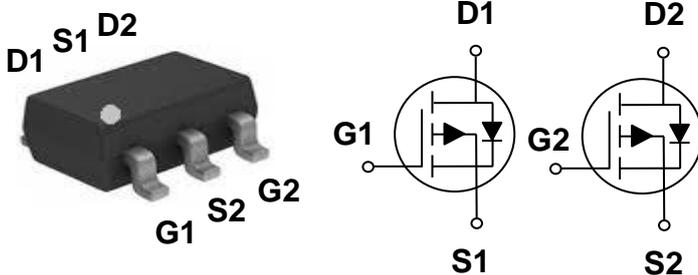

BVDSS	RDSON	ID
-20V	85mΩ	-3A

Features

- -20V, -3A, $R_{DS(ON)} = 85m\Omega @ V_{GS} = -4.5V$
- Improved dv/dt capability
- Fast switching
- Green Device Available
- Suit for -1.8V Gate Drive Applications

Applications

- Notebook
- Load Switch
- Hand-Held Instruments



Absolute Maximum Ratings $T_c=25^\circ C$ unless otherwise noted

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	-20	V
V_{GS}	Gate-Source Voltage	± 10	V
I_D	Drain Current – Continuous ($T_A=25^\circ C$)	-3	A
	Drain Current – Continuous ($T_A=70^\circ C$)	-2.4	A
I_{DM}	Drain Current – Pulsed ¹	-12	A
P_D	Power Dissipation ($T_A=25^\circ C$)	1.25	W
	Power Dissipation – Derate above $25^\circ C$	0.01	W/ $^\circ C$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ C$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ C$

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	100	$^\circ C/W$

Electrical Characteristics (T_J=25 °C, unless otherwise noted)
Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =-250uA	-20	---	---	V
ΔBV _{DSS} /ΔT _J	BV _{DSS} Temperature Coefficient	Reference to 25°C, I _D =-1mA	---	0.01	---	V/°C
I _{DSS}	Drain-Source Leakage Current	V _{DS} =-20V, V _{GS} =0V, T _J =25°C	---	---	-1	uA
		V _{DS} =-16V, V _{GS} =0V, T _J =125°C	---	---	-10	uA
I _{GSS}	Gate-Source Leakage Current	V _{GS} =±10V, V _{DS} =0V	---	---	±100	nA

On Characteristics

R _{DS(ON)}	Static Drain-Source On-Resistance	V _{GS} =-4.5V, I _D =-3A	---	70	85	mΩ
		V _{GS} =-2.5V, I _D =-2A	---	95	120	
		V _{GS} =-1.8V, I _D =-1A	---	130	170	
V _{GS(th)}	Gate Threshold Voltage	V _{GS} =V _{DS} , I _D =-250uA	-0.3	-0.6	-1.0	V
ΔV _{GS(th)}	V _{GS(th)} Temperature Coefficient		---	3	---	mV/°C
g _{fs}	Forward Transconductance	V _{DS} =-10V, I _S =-1A	---	2.2	---	S

Dynamic and switching Characteristics

Q _g	Total Gate Charge ^{2, 3}	V _{DS} =-10V, V _{GS} =-4.5V, I _D =-3A	---	4.8	8	nC
Q _{gs}	Gate-Source Charge ^{2, 3}		---	0.5	1	
Q _{gd}	Gate-Drain Charge ^{2, 3}		---	1.9	4	
T _{d(on)}	Turn-On Delay Time ^{2, 3}	V _{DD} =-10V, V _{GS} =-4.5V, R _G =25Ω I _D =-1A	---	3.5	7	nS
T _r	Rise Time ^{2, 3}		---	12.6	24	
T _{d(off)}	Turn-Off Delay Time ^{2, 3}		---	32.6	62	
T _f	Fall Time ^{2, 3}		---	8.4	16	
C _{iss}	Input Capacitance	V _{DS} =-15V, V _{GS} =0V, F=1MHz	---	350	510	pF
C _{oss}	Output Capacitance		---	65	95	
C _{rss}	Reverse Transfer Capacitance		---	50	75	

Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I _S	Continuous Source Current	V _G =V _D =0V, Force Current	---	---	-3	A
I _{SM}	Pulsed Source Current		---	---	-6	A
V _{SD}	Diode Forward Voltage	V _{GS} =0V, I _S =-1A, T _J =25°C	---	---	-1	V

Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. The data tested by pulsed, pulse width ≤ 300us, duty cycle ≤ 2%.
3. Essentially independent of operating temperature.

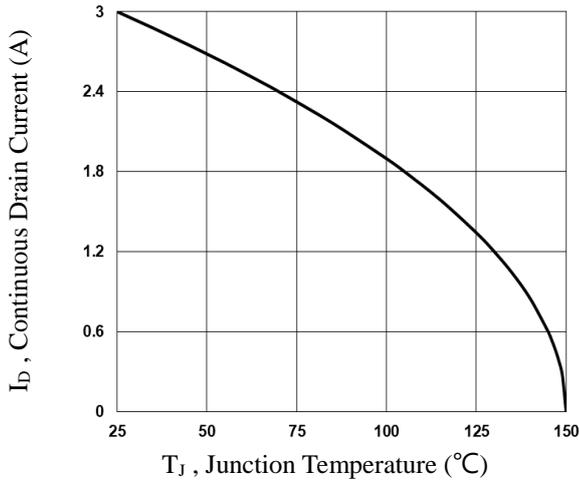


Fig.1 Continuous Drain Current vs. T_J

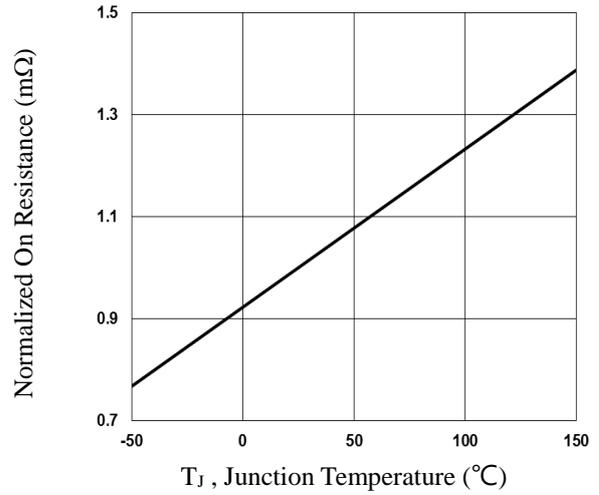


Fig.2 Normalized R_{DS(on)} vs. T_J

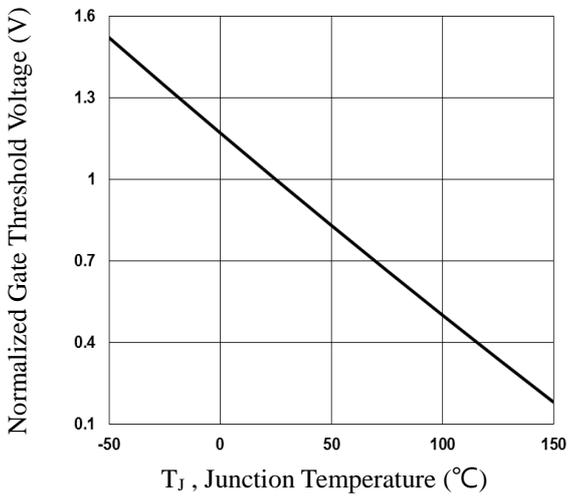


Fig.3 Normalized V_{th} vs. T_J

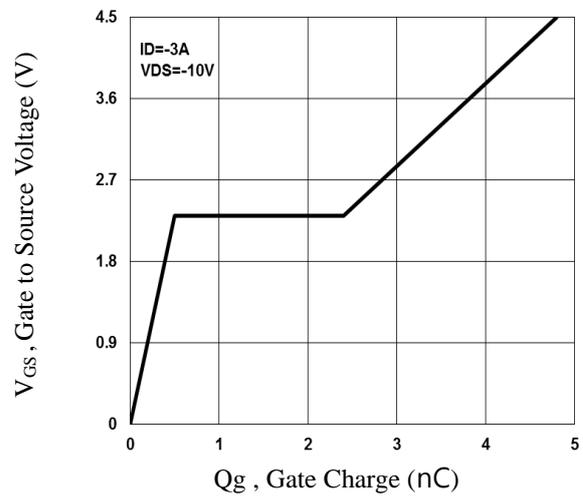


Fig.4 Gate Charge Waveform

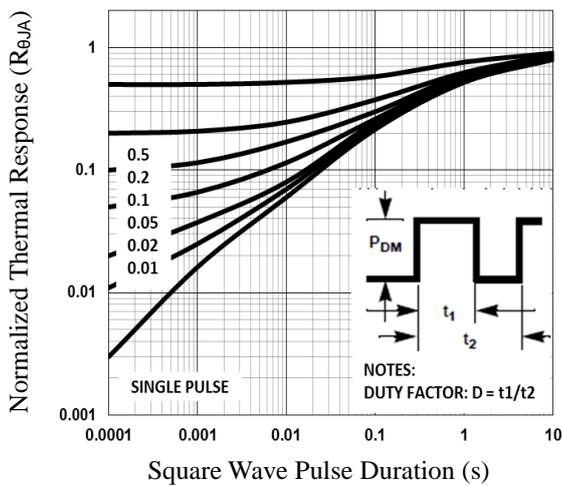


Fig.5 Normalized Transient Impedance

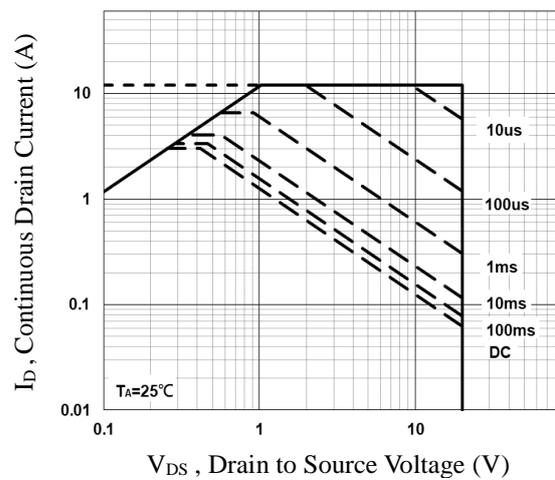


Fig.6 Maximum Safe Operation Area

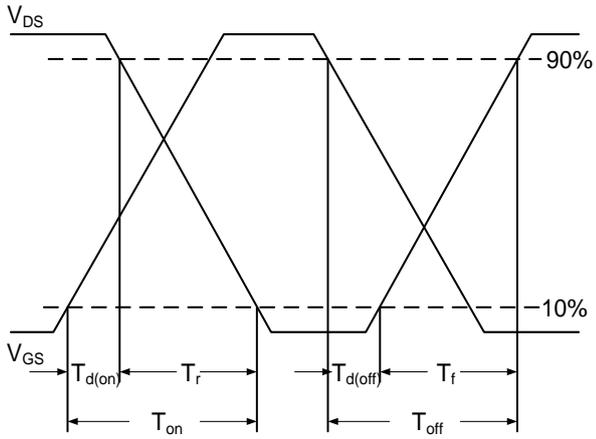


Fig.7 Switching Time Waveform


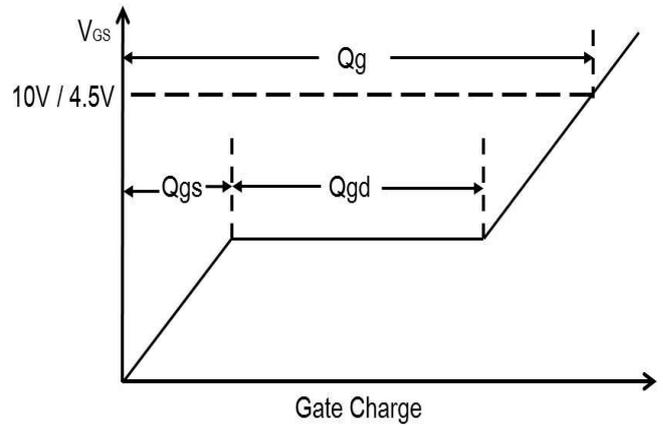


Fig.8 Gate Charge Waveform



SOT23-6 Dual PACKAGE INFORMATION

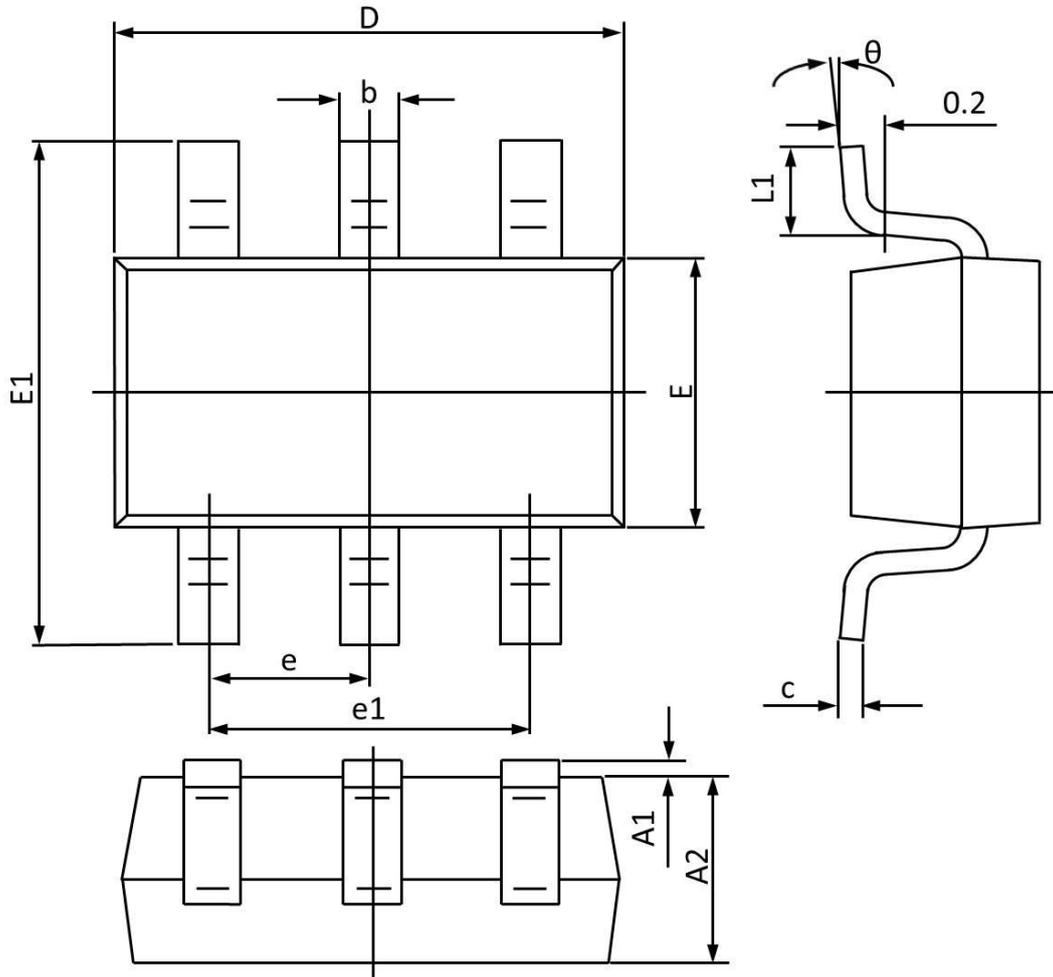

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A1	0.000	0.100	0.000	0.004
A2	1.000	1.200	0.040	0.047
b	0.300	0.500	0.012	0.019
c	0.047	0.207	0.002	0.008
D	2.800	3.000	0.110	0.118
E	1.500	1.800	0.059	0.070
E1	2.600	3.000	0.103	0.118
e	0.950 TYP		0.037 TYP	
e1	1.900 TYP		0.075 TYP	
L1	0.250	0.550	0.010	0.021
θ	0°	8°	0°	8°